



HOSHIZAKI

IM-24oANE-HC CUBE ICE MAKER

Product Description

The IM-24oANE-HC is HydroCarbon modular Cube Ice Maker. This machine can produce up to 235 kg per 24 hours and still use just 50 per cent of the legal allowance of HydroCarbon. It is possible to combine with all bins available.



- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- Hoshizaki ice makers are micro computer controlled, controlling the ice making process to perform at its best under varying circumstances, without having to make physical adjustments.
- A stainless steel exterior provides a hygienic and high quality finish.
- Automatic shutdown of a machine in case of leaking gas is ensured by installed leak detector.
- Foam injected polyurethane for insulation (HFC free), helps preserve the quality and consistency of the ice produced, reducing the number of production cycles.
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs.

Available Models

IM-24oANE-HC (Air cooled)
IM-24oANE-HC-23 (Air cooled)

Ice Cubes

Model	Size	Shape
IM-24oANE-HC	Cube Approx. 28x 28x 32mm	

Bins

Model	Type of Bin	Max. Bin Capacity
B-301SA	Modular	144kg
B-501SA, Top Kit TK 8 D		217kg
B-801SA, Top Kit TK 8 D + TK 18 D		348kg

Production

Model	Ice Production per 24h	Temperature	Ice Production per Cycle	Water Consumption per 24h
IM-24oANE-HC	Approx. 235kg (15mm) / 210kg (5mm) Approx. 210kg (15mm) / 195kg (5mm) Approx. 190kg (15mm) / 170kg (5mm)	AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C	Approx. 3,2kg/140.pcs	Approx. 0,67m ³ Approx. 0,32m ³ Approx. 0,29m ³

Two year warranty

For more information visit our website at www.hoshizaki-europe.com
Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.






HOSHIZAKI

IM-240ANE-HC CUBE ICE MAKER

IM-240ANE-HC

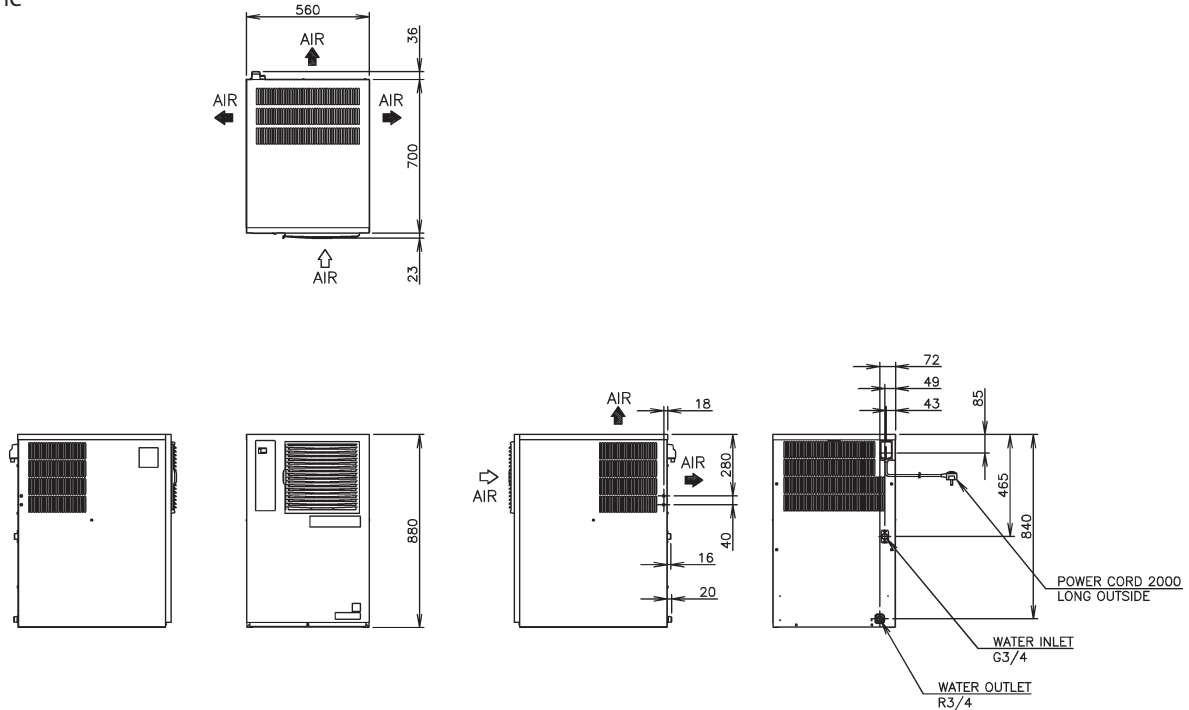

Specification	IM-240ANE-HC
Ac Supply Voltage	1 PHASE 220-240V 50Hz
Amperage (AT.32°C, WT.21°C)	4.0A
Starting Amperage	27A
Electric Consumption (AT.32°C, WT.21°C)	930W
Freeze Cycle Time (AT.21°C, WT.15°C)	Approx. 24min
Exterior	Stainless Steel
Insulation Foam Blowing Agent	-
Connections - Electric	X-Type Con.
Connections - Water Supply	Inlet G3/4 (connected at rear side)
Connections - Drain	Outlet R3/4 (connected at rear side)
Ice Making System	Cell type
Harvesting System	Hot Gas Defrost
Condenser	Air-cooled, Spiral tube type
Heat Rejection (AT.32°C, WT.21°C)	2330W
Evaporator	Copper Tube on Sheet and Cells
Refrigerant Control	Thermostatic Expansion Valve
Refrigerant Charge	R290/147g
Bin Control System	Microswitch with Time Delay
Ice Making Control System	Thermistor, Timer
Electrical Protection	Class I Appliance, 5A Fuse
Compressor Protection	Overload Protector (Auto- reset), Pressure Switch (Auto-reset)
Ice Maker Protection	Interlock by Controller Board
Dimensions Product excl. Packaging	560 x 700 x 880 (W x D x H, mm)
Dimensions Product incl. Packaging	820 x 665 x 1054 (W x D x H, mm)
Weight Gross / Net	89kg / 78kg

Operation Conditions	
Ambient Temperature	1 - 40°C
Water Supply Temperature	5 - 35°C
Water Supply Pressure	0,07-0,78MPa (0,7-8bar)

Accessories
Scoop
Ice Chute
Installation Kit

For more information please contact your local sales office:

Hoshizaki Belgium: info@hoshizaki.be
 Hoshizaki Deutschland: info@hoshizaki.de
 Hoshizaki France: info@hoshizaki.fr
 Hoshizaki Iberia: info@hoshizaki.es
 Hoshizaki Middle East: sales@hoshizaki.ae

Hoshizaki Nederland: sales@hoshizaki.nl
 Hoshizaki United Kingdom: uksales@hoshizaki.co.uk
 Other countries: sales@hoshizaki.nl

www.hoshizaki-europe.com